

Leighton Buzzard Station AFA



SPENCER
British Engineering

*“AFA –
improving
access for all at
stations across
Bedfordshire”*



Leighton Buzzard station

FOUNDATIONS
MAIN STEEL
SPS
WIRE RE-PROFILING
REGISTRATION



JUNE 2014 -
OCTOBER 2014

VALUE
£200K

LEIGHTON
BUZZARD




Leighton Buzzard Station AFA



As part of the AFA (Access for All) modifications at Leighton Buzzard Station, a new walkway bridge over the West Coast Main Line was installed across four tracks to provide access to all platforms.

To facilitate these works, Pod-Trak were subcontracted to design, supply and install new foundations, structures, SPS, headspans, wire splicing and re-profiling of the OLE through the bridge.

All works were carried out during possession/isolation periods and necessary arrangements were put in place to protect the public during foundation installation.

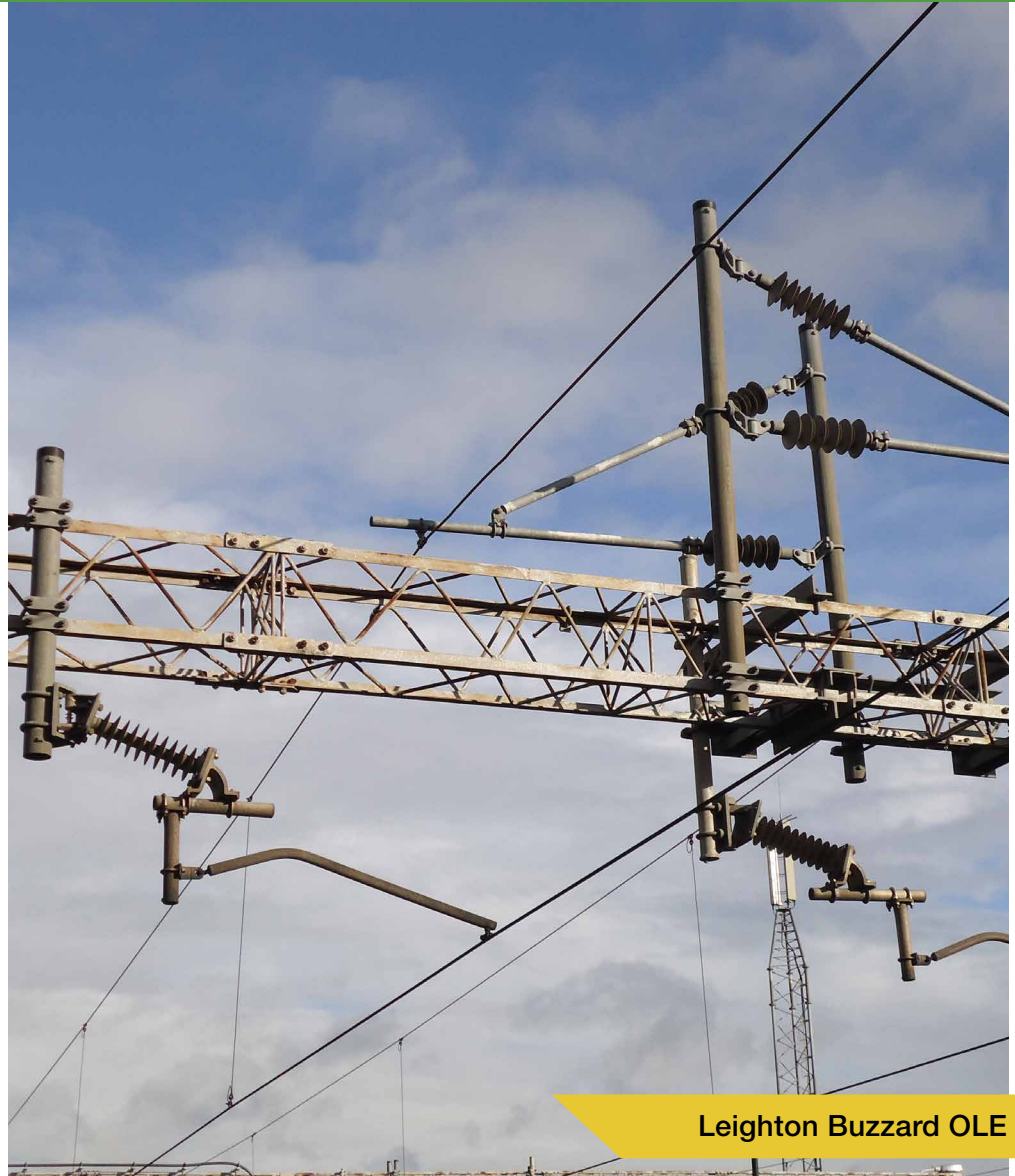

Leighton Buzzard OLE